



Rupture Pin A BRAND of _____
Taylor Valve Technology

GET THE POWER OF THE PIN

MODEL C

Angle Type Model

FROM THE
CREATORS
OF THE
Original
BUCKLING
PIN
VALVE



The **Model C** holds a bubble-tight, closed position until pressure reaches an exact set point. At set point, the valve instantly opens to relieve pressure from a protected system.

- Wide variety of pressures ratings and settings.
- Orifices usually full bore or greater.
- Reliable settings.
- Utilizes proven design principle – Euler's Law.
- Provides bubble-tight seal in closed position.
- +/- 5% accuracy of set pressure. Accuracy usually held below +/- 3%.
- Stainless steel seat and piston – standard.
- Reseats rapidly without opening the valve or line to atmosphere.
- Pin flag shows the pin code, valve serial number and pin set point in PSIG.
- No loose metal or plastic shards to enter the flow stream upon opening.
- One moving part.
- The pin cannot fatigue.
- Provides a reliable signal with the proximity sensor to monitor the stem movement and gives a remote indication that the valve has opened (*Option*).
- Spare pins can be stored at the valve (*Option*).
- Balanced piston design to negate the effects of back pressure (*Option*).

WWW.RUPTUREPIN.COM SINCE 1958

MODEL C

ADVANTAGES

- Visual and remote indication of opening
- No fugitive emissions, even on resetting
- Does not generate metal or plastic shards
- Unaffected by pulsating pressures
- Unaffected by changing ambient temperatures on the pin
- Bubble-tight seal to set point
- Opens in milliseconds
- Operates to within 95% of set point
- Pin cannot fatigue and buckle early
- Precise pin, obeying Euler's Law, acts as a pressure sensor and actuator
- The valve can be downstream balanced so that downstream pressure does not affect set point
- Valve operates in constant back pressure, variable back pressure or vacuum

APPLICATIONS

Provides safety for a wide variety of pressure relief applications. The ideal substitute for rupture discs.

SPECIFICATIONS

VALVE POSITION

Pins are sized with the valve oriented as it will be in actual use; so piston weight will not affect set point.

PRESSURE SET POINT RANGE

5 to 3,000 PSI.

SIZES

1/2" to 48".

CONNECTIONS

Standard and custom connections available.

VALVE SEALS

Available for high and low temperatures, Viton standard.

STANDARD MATERIALS

Body mild steel with stainless steel trim, other materials optional.

ACCURACY

+/- 5%


DOWNSTREAM PRESSURE BALANCED

Optional, an additional piston balances out downstream pressure.

OPERATION

In the closed position, an elastomer seal contacts a machined, stainless steel piston seat for a bubble-tight shut off. When the pin buckles, the piston moves off seat to allow full flow pressure relief.


Closed

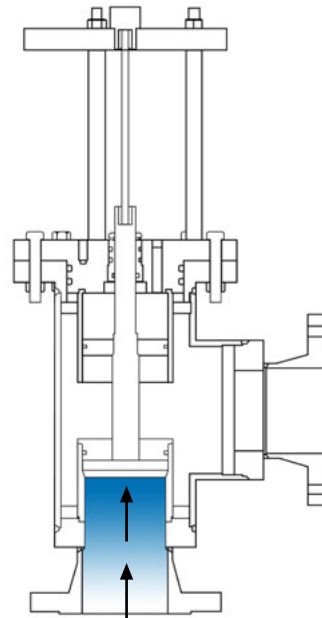

(Straight Pin)

Pressure At Set Point

Open

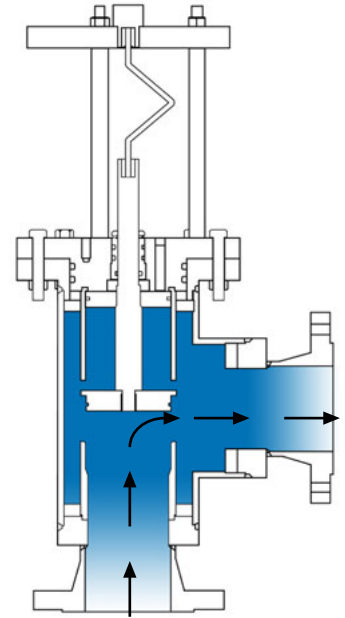

(Buckled Pin)

Pressure Below Set Point

EULER'S LAW

$$\frac{\text{Axial Force on the Pin Causing the Pin to Buckle (Piston/Plunger Area x System Pressure)}}{\text{Pin Diameter}^4 \times \text{Pin Material Modulus of Elasticity}} \sim \frac{1}{\text{Pin Length}^2}$$

OPTIONS

PROXIMITY DEVICE

For remote open indication.

PIN CONTAINER

Pin storage at the valve.

FLUSH PORT

Washing inlet seat.

STAINLESS STEEL PIN GUARD

Protects your pin from accidental damage